




Erbius SF Product Line

Single Frequency CW 1560 (1535-1580) nm fiber Laser Erbius-SF-15xxL series

Key features



- Single Frequency
- Ultra Narrow linewidth (<1 kHz)
- TEM₀₀ mode
- Superior beam quality ($M^2 < 1.05$)
- Thermal wavelength tuning
- Fast piezo tuning

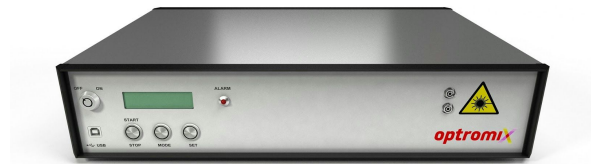

Erbius-SF-1560L is a single frequency 1535 nm - 1580 nm Er-doped fiber laser with the wide-range thermal wavelength tuning and optional active wavelength control. SF series key parameter is an ultra narrow linewidth (< 1 kHz) based on the longitudinal single mode. Erbium are controlled by the on-board digital display, switches, and adjustment controllers. Erbium comes with a piezoelectric tuning for external wavelength modulation at kHz bandwidth for locking purposes. A full set of control electronics and power supply are included in the delivery package. The control interface software provides optionally. This is a perfect tool due to excellent performance, high reliability, and lower cost.

Applications

- Atomic trapping and cooling
- Spectroscopy
- Optical sensing
- Measurements
- Optical tweezers
- Other

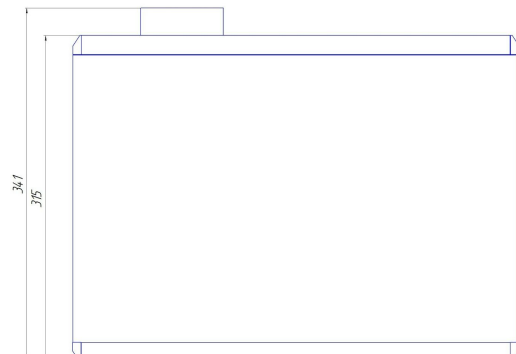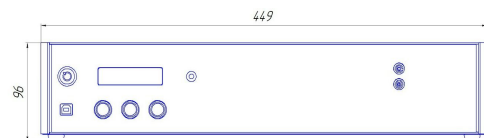



Erbium-SF-15**L specifications

Parameter	Erbium-SF-1560L	Erbium-SF-1550L
Operating mode	CW, Single Frequency, TEM ₀₀	
Central wavelength	1560 nm	1550 nm
Linewidth (FWHM)	< 1kHz	< 10 kHz
Nominal output power	50mW, 100mW, 200mW, 500mW	
Fast piezo tuning	PZT by default for external generator (built-in generator optional)	
Long term instability	< 1%	
Polarization	Random	
Beam quality (M ²)	< 1.05	
Control interface	Wavelength control output, Front panel with display, RS232/USB (optional)	
Operating voltage	110 - 130V, 220 - 240 V, 50 - 60 Hz, Single Phase	
Operation temperature	10 - 50 °C	
Storage temperature	- 40 - +70 °C	
MTBF	> 10.000 Hrs	
Operation Humidity	10 - 85 %	
Cooling	Forced air	
Dimensions (WxHxL)	449mm x 96mm x 341mm	
Weight	< 6 kg	

- Optromix fiber systems can be customized by request.
- Warranty: 1 year.



Ordering Information:

Product Code	Erbium-SF-15xxL-yyy-cc	xx:	Wavelength (nm)
		yyy:	Output power (mW)
		cc:	Optical output: FO - fiber output, CM - collimator, FS - free space, FA = FC/APC FU = SC/UPC, SA = SC/APC SU = SC/UPC

Information in this document is a subject to change without notice.